

# H<sub>2</sub>O Pro<sup>®</sup> Pavers

## Permeable Paving Units

Featuring Genesis Face-mix Technology™

Manufactured in the USA By






Our **H<sub>2</sub>O Pro<sup>®</sup> Pavers** (Permeable Paving Units) are an effective storm water management solution on site. Their 3<sup>1</sup>/<sub>8</sub>" (80 mm) thickness withstands heavy low speed vehicular loads, making them a suitable option for driveways, walkways and parking lots.

For product details, photos, and to find out where to buy – visit [www.countymaterials.com](http://www.countymaterials.com)




# H<sub>2</sub>O Pro® Pavers Permeable Paving Units

## Units & Sizes

	D x H x L (Nominal Size) Inches • Millimeters	SF/Unit	Units/ SF	SF/ Layer	Layers/ Pallet	SF/ Pallet	Units/ Layer	Units/ Pallet	Lbs/ Pallet
A 	4 x 3 1/8 x 8 • 99 x 80 x 199	.22	4.5	11	8	88	50	400	3085
B 	8 x 3 1/8 x 8 • 199 x 80 x 199	.44	2.25	13.2	8	105.6	30	240	3695
C 	8 x 3 1/8 x 16 • 199 x 80 x 399	.89	1.13	13.2	8	105.6	15	120	3820

- Installed joint dimensions = 10 mm (<sup>25</sup>/<sub>64</sub>" )
- Installed open area/layer = ±9.1% (depending on pattern)

## Layer Configurations

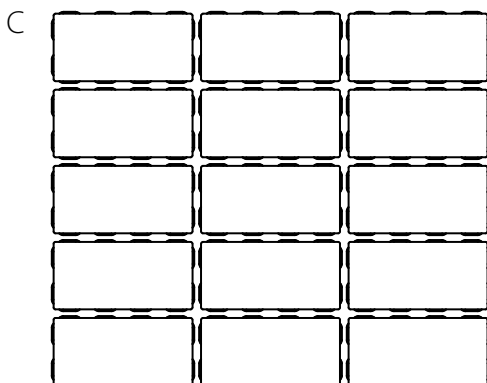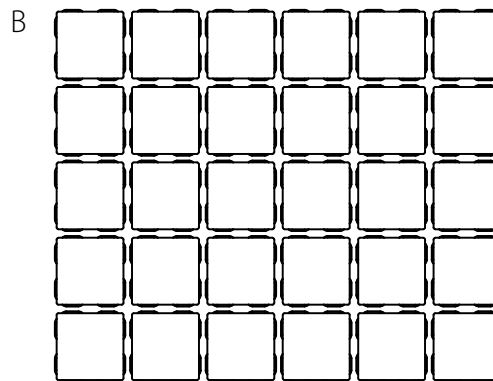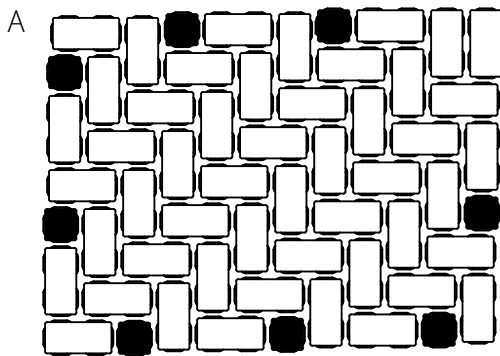


**Note:** The 4" x 8" size of H<sub>2</sub>O Pro Pavers are manufactured in a herringbone layer pattern that easily accommodates mechanical installation. Units can also be installed in many different patterns by hand.

**Note:** (A) 4" x 8" layer pattern includes 4" x 4" pieces which are included for packaging purpose only and are not recommended for installation.

# H<sub>2</sub>O Pro® Pavers Permeable Paving Units


## Colors

Available in the following colors and textures:

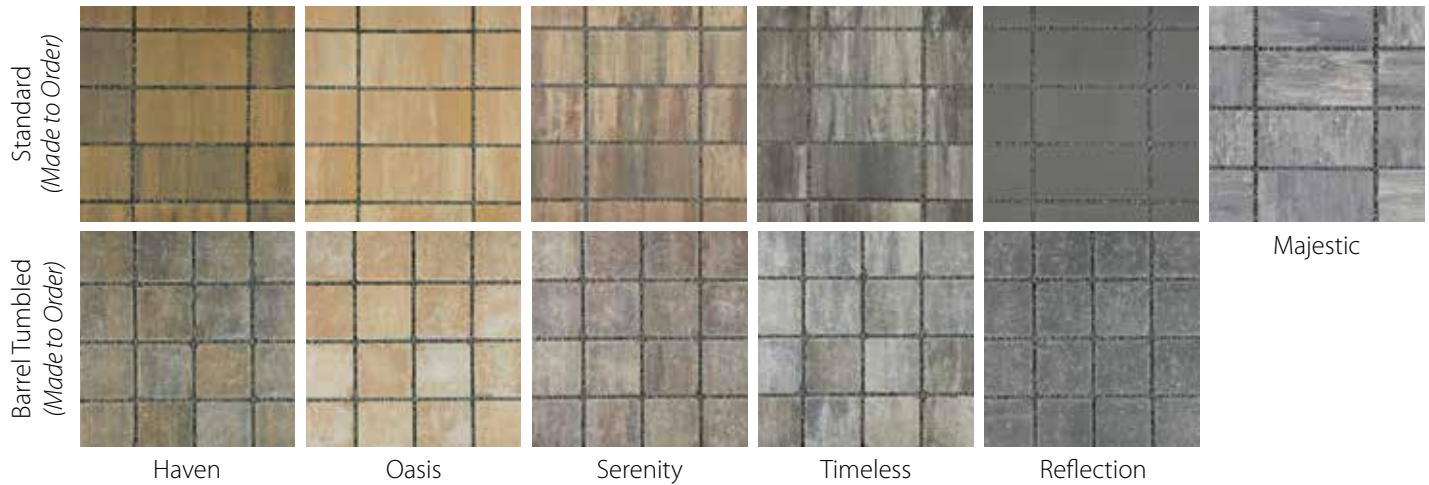

*The color photos shown in this catalog were prepared with careful attention to accuracy. However, colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete units are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry.*


## Installation Patterns

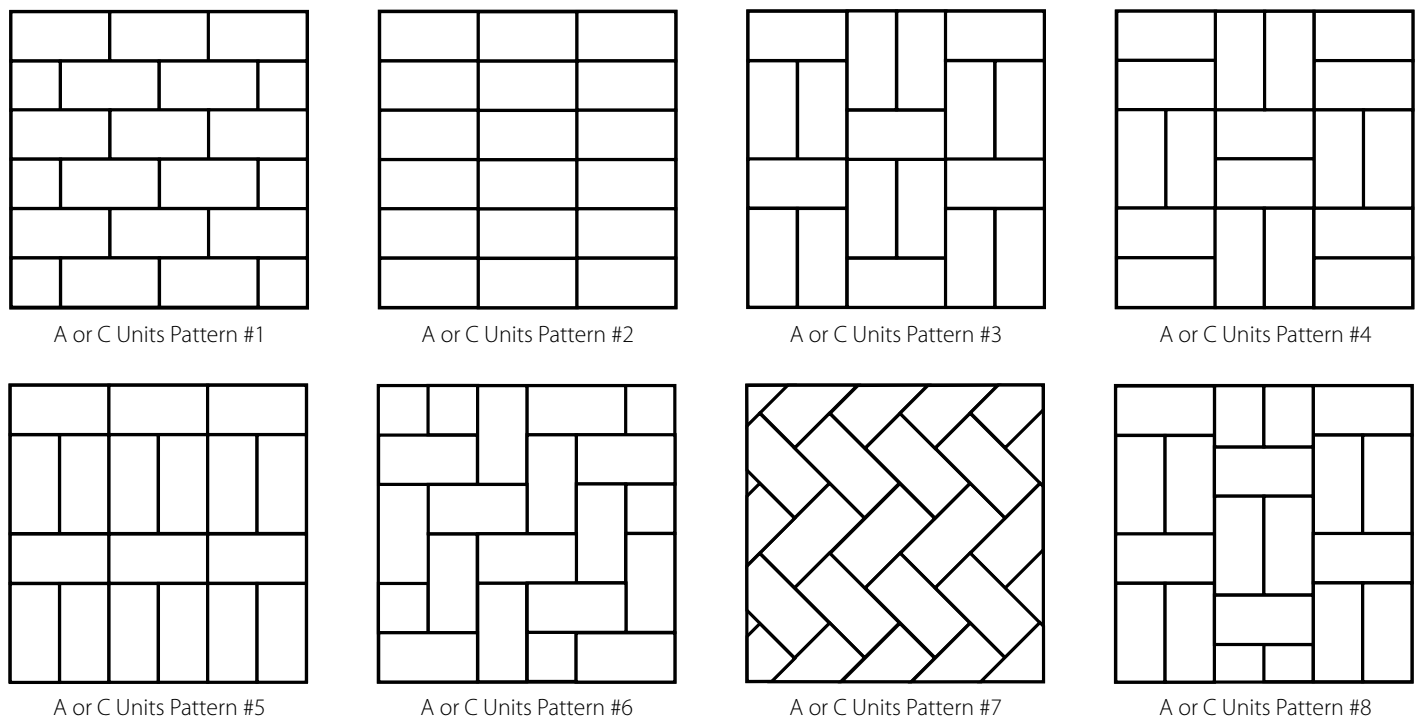




# H<sub>2</sub>O Pro® Pavers Permeable Paving Units


## Installation Patterns




B or C Units Pattern #9




B or C Units Pattern #10




A or C Units Pattern #11




A or C Units Pattern #12




A, B & C Units #13  
A-42% B-25% C-33%




B Units #14




A, B & C Units Pattern #15  
A-17% B-29% C-57%




A, B & C Units Pattern #16  
A-14% B-29% C-57%

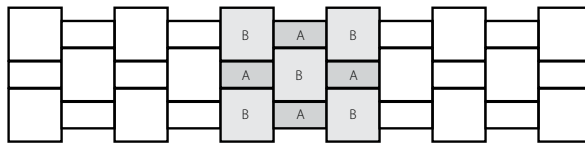

A & B Units #17  
A-29% B-71%

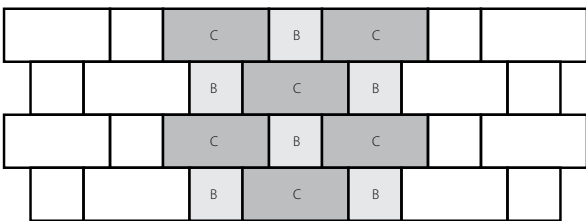

B & C Units #18  
B-33% C-67%

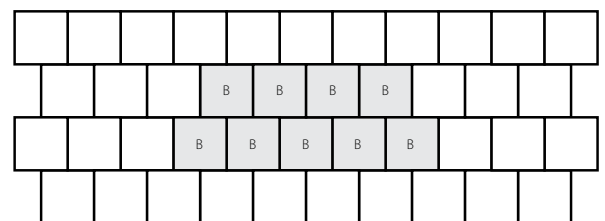

B Units #19



**(800) 242-7733**  
**countymaterials.com**

H<sub>2</sub>O Pro® Pavers is a registered trademark  
of County Materials Corp.

©2020 County Materials Corporation • 0353\_0320